


# 10 X 8 PUMP

|                 |                      |
|-----------------|----------------------|
| HORSEPOWER      | 380                  |
| ENGINE          | Cummins              |
| PUMP            | Cornell 8NHTA        |
| MIN FLOW        | 400 GPM (91 m3/h)    |
| MAX FLOW        | 5100 GPM (1158 m3/h) |
| DISCHARGE SIZE  | 8" (203mm)           |
| SUCTION SIZE    | 10" 254mm)           |
| SOLIDS HANDLING | 3.38" (86mm)         |
| MAX SPEED       | 1800 RPM             |
| SHUT OFF HEAD   | 350' 107m)           |
| BEP HEAD        | 219' (67m)           |
| BEP FLOW        | 3697 GPM (840m3/h)   |
| BEP PERCENT     | 82%                  |



| Torque Curve with NTE Zone (CEB00346) |       |      |                    |      |  |
|---------------------------------------|-------|------|--------------------|------|--|
| 91.44 m (300 ft)                      |       |      | 1676.4 m (5500 ft) |      |  |
| RPM                                   | lb-ft | N-m  | lb-ft              | N-m  |  |
| 800                                   | 690   | 936  | 582                | 789  |  |
| 900                                   | 825   | 1119 | 730                | 990  |  |
| 1000                                  | 900   | 1220 | 900                | 1220 |  |
| 1200                                  | 1040  | 1410 | 1040               | 1410 |  |
| 1300                                  | 1069  | 1449 | 1069               | 1449 |  |
| 1500                                  | 1200  | 1627 | 1200               | 1627 |  |
| 1600                                  | 1187  | 1609 | 1182               | 1603 |  |
| 1800                                  | 1140  | 1546 | 1118               | 1516 |  |
| 1900                                  | 1107  | 1501 | 1069               | 1449 |  |
| 2100                                  | 950   | 1288 | 925                | 1254 |  |
| 2130                                  | 920   | 1247 | 0                  | 0    |  |

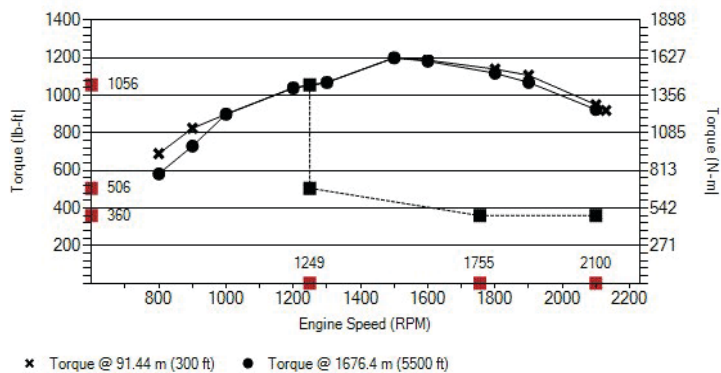

## FEATURES

- Full Containment
- Lifting Bale
- 10,000lb Axles
- LED Lighting
- Contained Battery Box
- Pintal Hitch
- Weight Distribution for Easy Towing
- Endura Paint
- Controls INC Panel
- ½" Weld Olets on Suction and Discharge for Telematics
- Fuel Capacity: 1100 liters
- Customizable to Customer Specifications

[WWW.CROSSCOUNTRYCANADA.CA](http://WWW.CROSSCOUNTRYCANADA.CA)  
**780-962-6559**

